

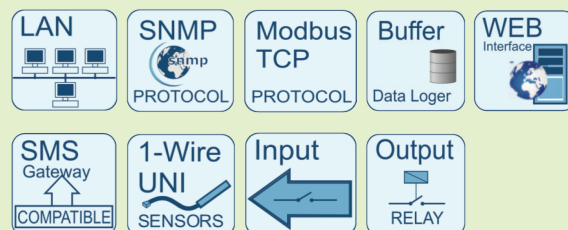
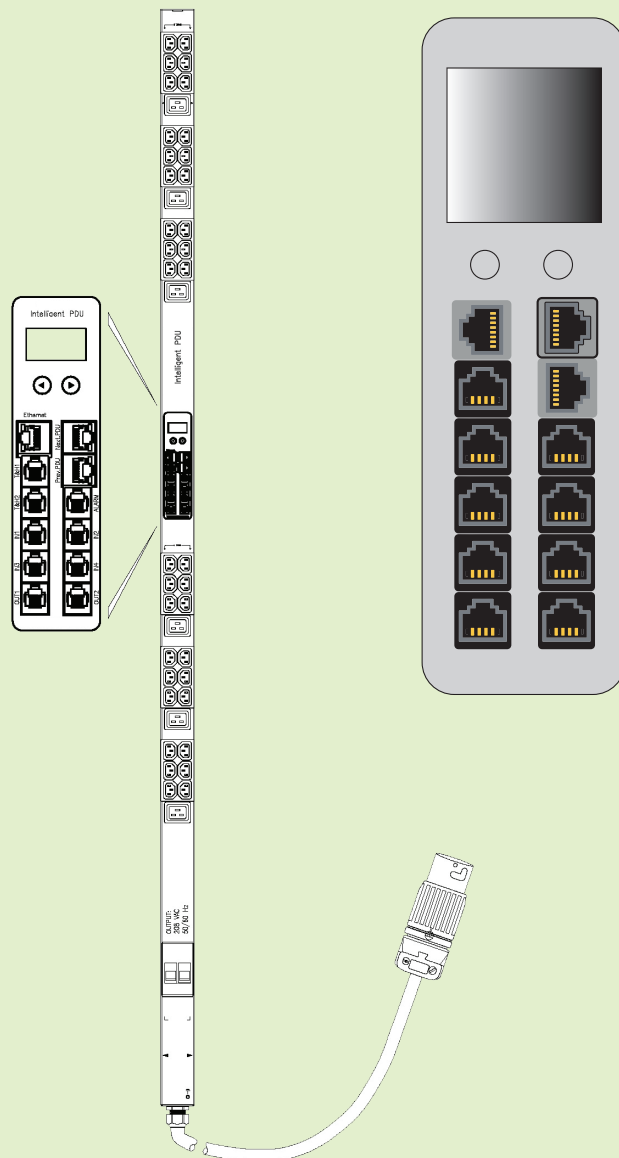


Datasheet:
BTE-DCIM/Smart PDU Zero Unit "Type C"
 Switched & Metered


Power Supply	4W 220V	✓
Power Supply	24V	✓
PoE Support	24V	✓
Digital Input	4 input Dry contact	✓
Digital Output	2 Transistor 30V 500mA 1 Transistor Out for Alarm	✓
1-Wire Sensors	2Temp & Hum	✓
Communication Channels	Ethernet RJ 45 (10\100 , Modbus / TCP)	✓
Communication Channels	1 Modbus/RTU&RS-485	✓
Wireless	GSM Module - 2SIM	✓
Wireless	WiFi Module	✓
Earth fault detection		✓
Power Metering	3(0-50A) Line	✓
SNMP	Agent Ver.1, 2C, 3Trap	✓
Modbus protocols	TCP&RTU/ASCII	✓
Multi Language Web Server	Persian, English	✓
Rack Mounted		✓
Zero Unit		✓
Wall Mounted		✓
DIN-rail Mounts		✓
Operating Temperature	-10C, +70C	
Storage Temperature	-40C, + 85C	
Operating Humidity	Max %95 r.h , no condensation	

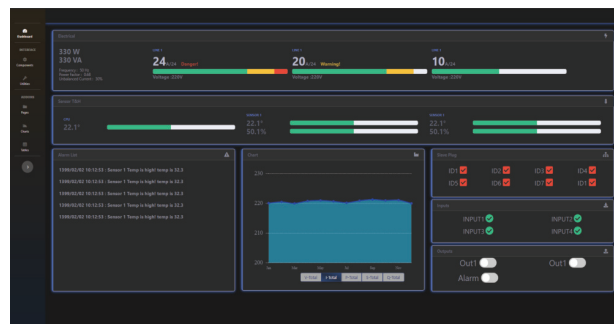

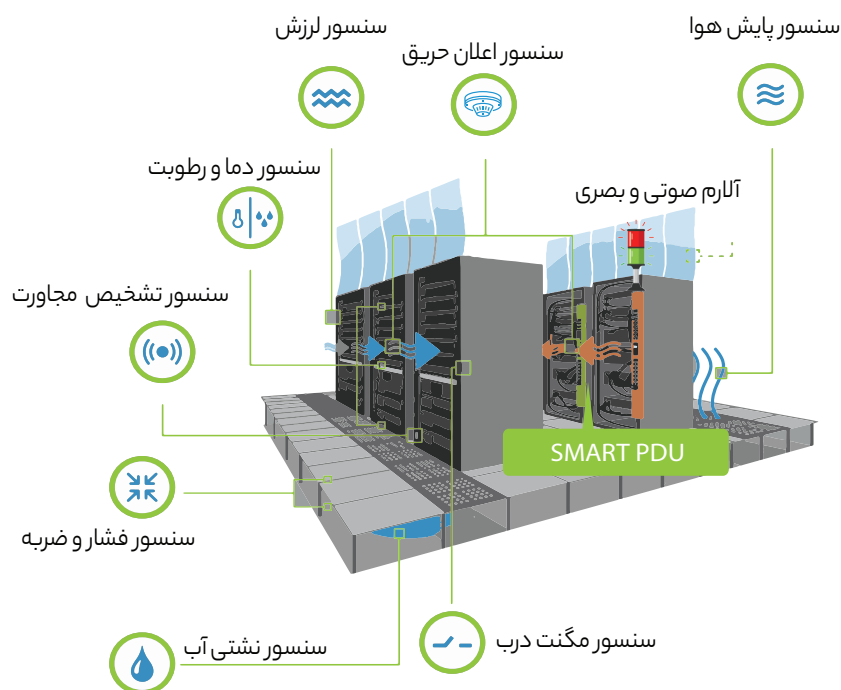

برد رله:

از این برد به جهت قطع و وصل هر یک از سه بانک موجود در یک پکیج PDU به صورت جداگانه استفاده می‌شود. این محصول به صورت جداگانه ارائه شده و سقف جریان دهی آن تا سی آمپر می‌باشد. همچنین قابلیت تعویض آی دی (ID) به صورت دستی را دارد.

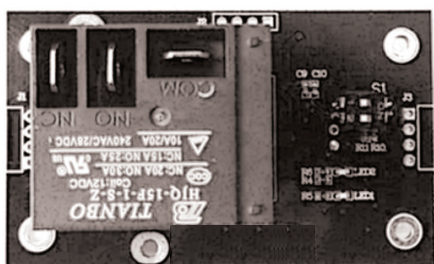

قابلیت‌های دستگاه

- معماری میکروکنترلر بر پایه تراشه‌های (ARM-Cortex M4) می‌باشد.
- قابلیت روشن شدن خودکار پس از قطع و وصل شدن برق
- تحول جریان بالا تا سقف ۳۰ آمپر
- دارای دو تیغه (NO) با جریان دهی متوسط ۲۵ تا ۳۰ آمپر

